


Fitting Instructions




Requiring no mechanical fixings or tools, securing the **QUICK-LOCK** Cone Reflector couldn't be easier and takes only seconds.



1. Position onto cone using the large diameter hole.

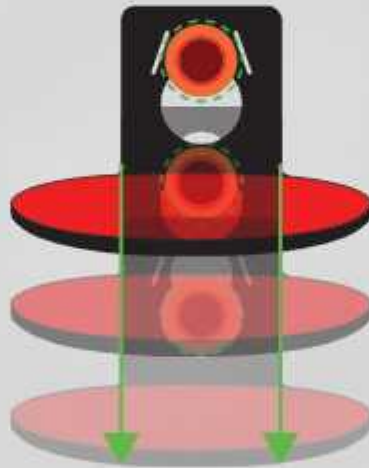

2. Pull the cone reflector forward into the smaller hole.

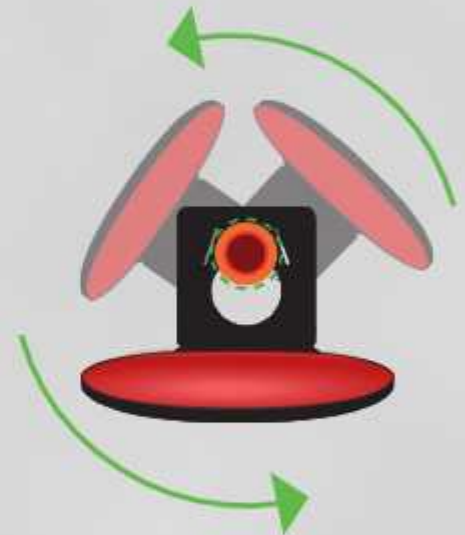

3. Twist to desired angle, locking into smaller hole.

REMEMBER: There are versions of Cone Reflector for each type of Cone - please specify brand and size of cone when ordering

Contact your Account Manager or Customer Service on 0115 973 8088 for more information and pricing